


5-2. MPX Section TU-S707X

*Design and specifications subject to change without notice for improvement.
 *La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suites d'améliorations éventuelles.
 *Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.

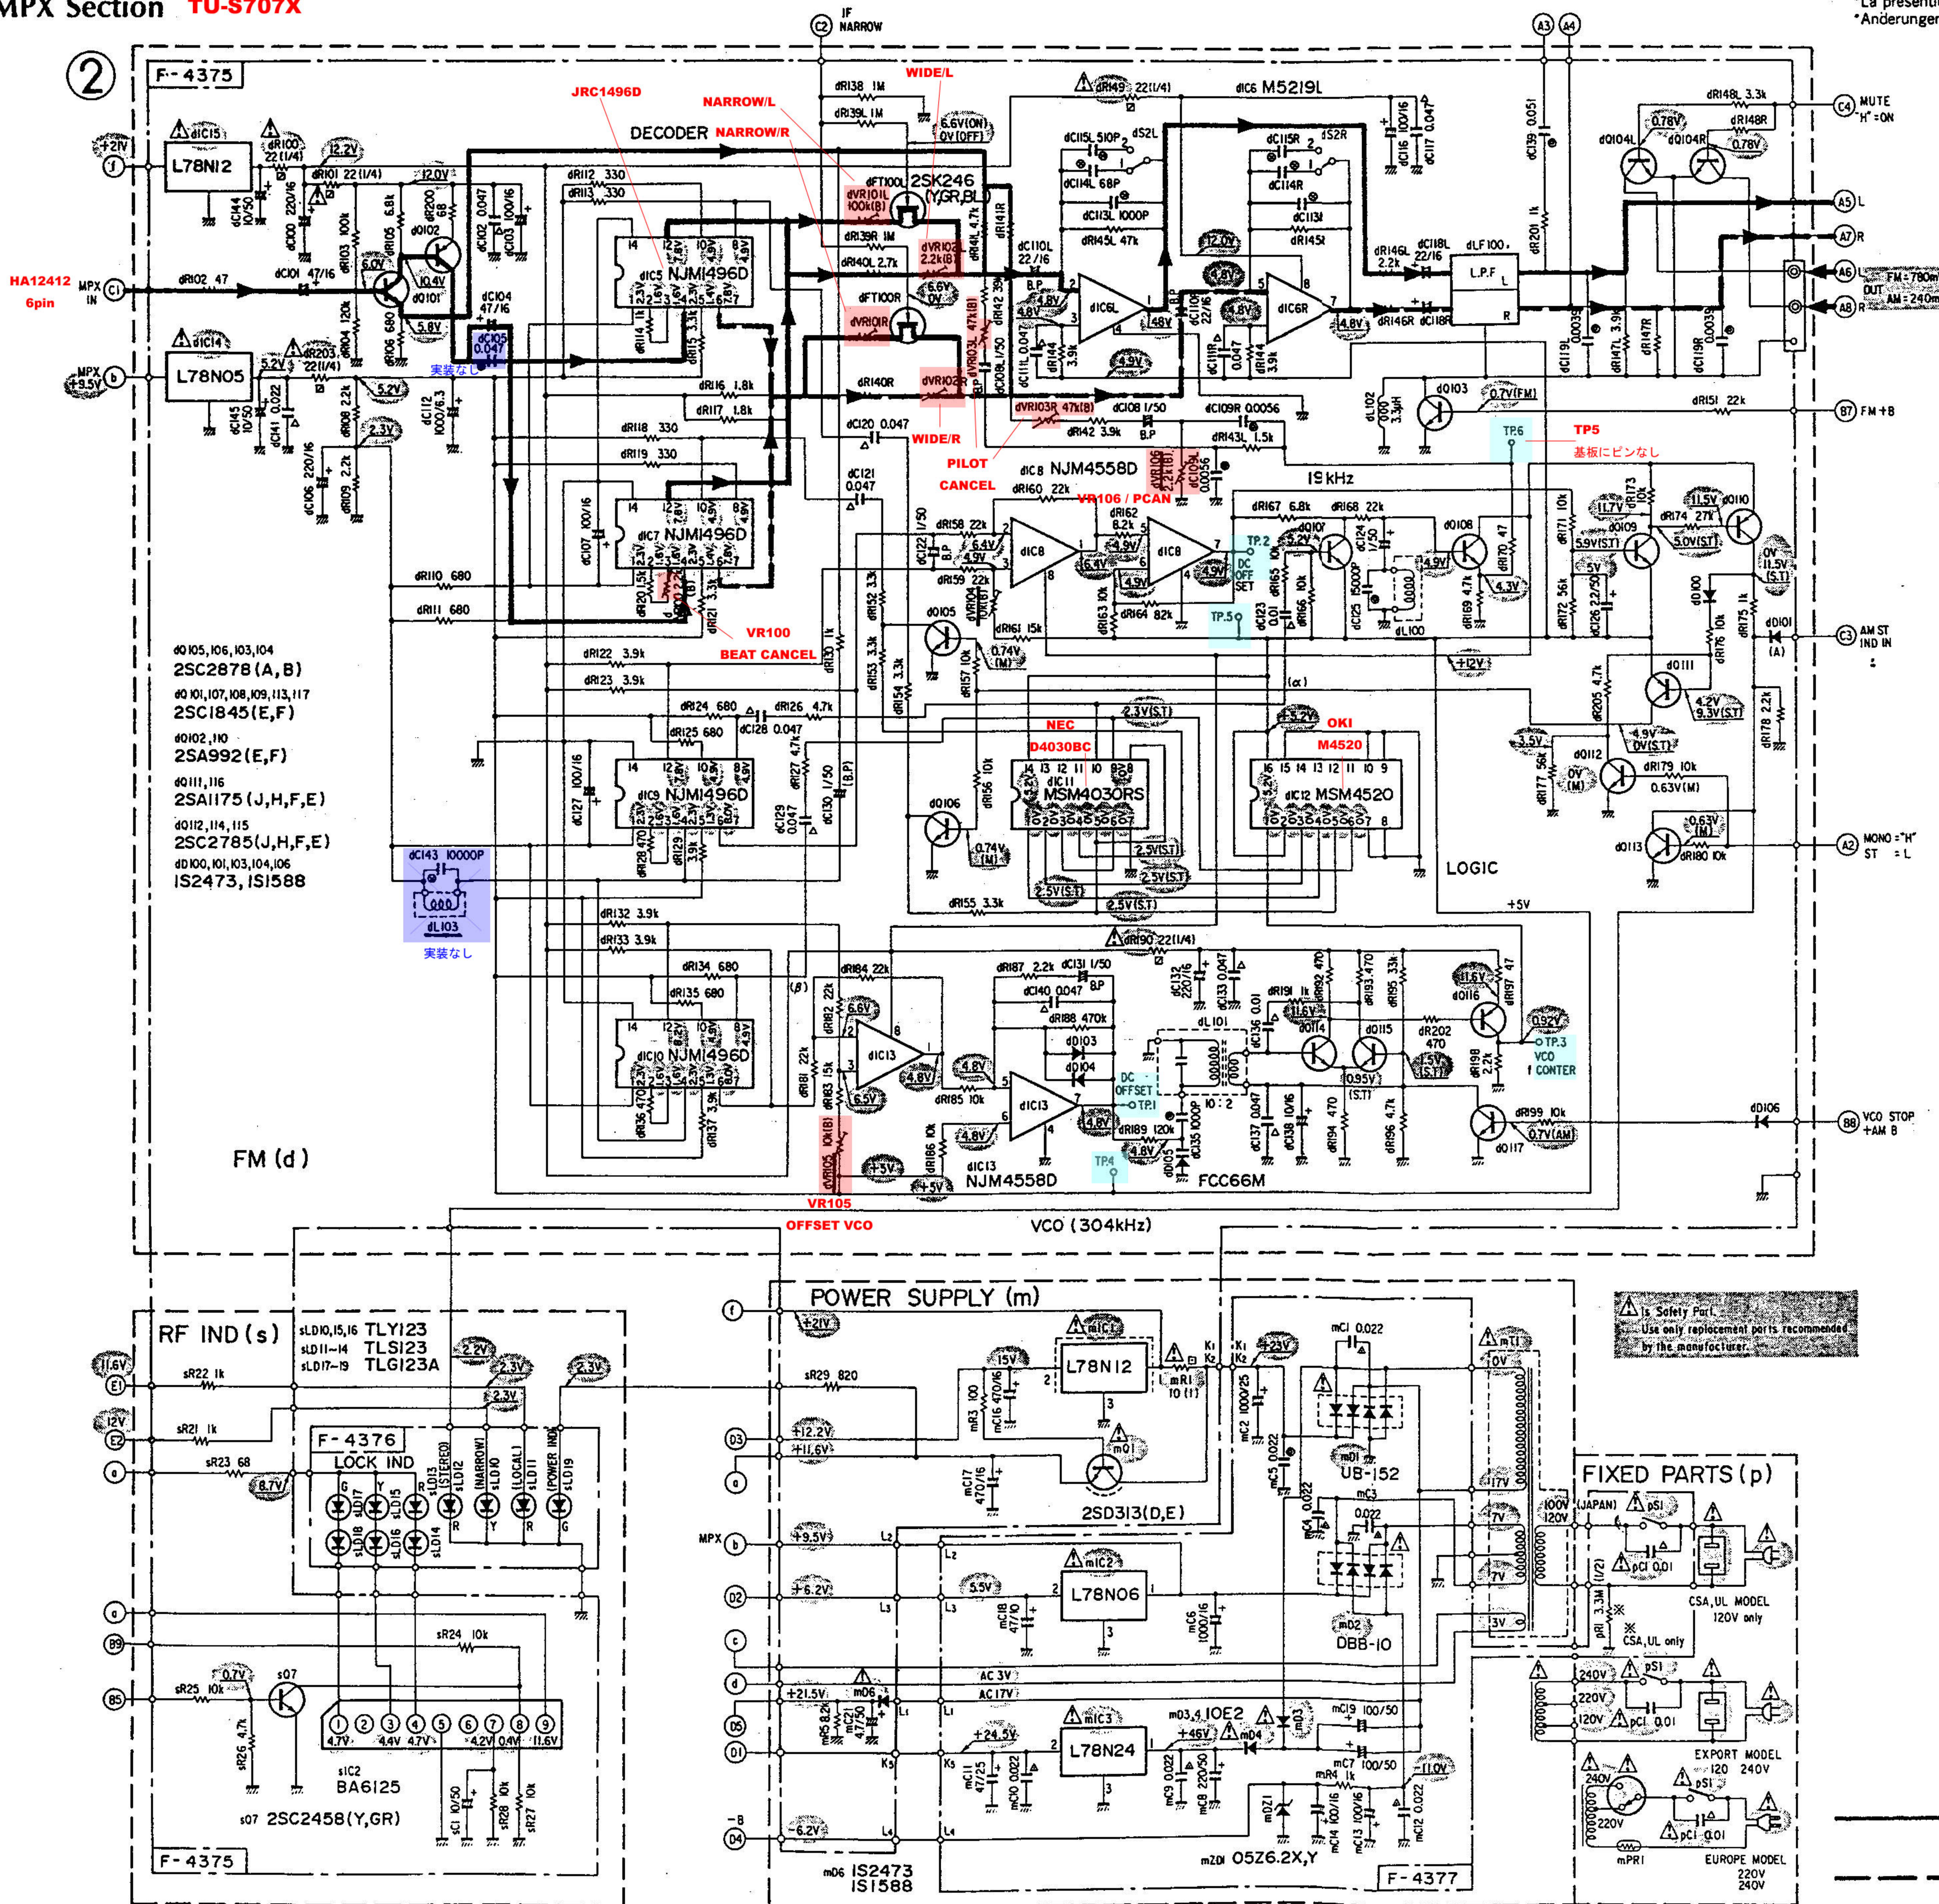

- SWITCH & Adjust**
- 452(L,R) FM de-emphasis 1. 50µs, 2. 75µs
 - POWER SW ON, OFF
 - Birdy Beat CANCEL Adjust
 - NARROW, SEPA Adjust
 - WIDE, SEPA Adjust
 - 19kHz Pilot CANCEL Adjust
 - 19kHz DC Amp DC OFFSET Adjust
 - VCO L-P Amp DC OFFSET Adjust

- CAPACITORS**
- Are in µF, Unless otherwise noted. P: P.F.
 ▲ Barrier Layer
 △ Ceramic
 ● Polystyrene
 ○ Film (Mylar)
 ⊙ Metallized Paper
 B.P. Bi-Polar Electrolytic

- RESISTORS**
- Are in ohms, 1/4 Watts, ±5% Tolerance
 Unless otherwise noted. K:kΩ, M:MΩ
- Fusing type
 □ Non-Inflammable type
- Each DC Voltage shows the nominal Value in Volts at no input signal
 The voltage parenthesized indicates the voltage is stereo signal reception

(O): TU-S77X, TU-S607G
 (A): TU-S77AMX

- 2SA992, 2SA1048
- 2SC1845, 2SA1115
- 2SC2878, 2SC2458
- 2SC2603
- 2SD313AL
- 2SA1175, 2SC2785
- 2SK246-BL, 2SK246-GR
- 2SK241-GR, 2SK117-GR
- 2SK117-Y, 2SK246-Y
- APC1163H
- M5219L
- 2SK192A-GR, 2SK241-GR
- 2SK192A-Y, 2SK241-Y
- TD6104P
- BA6125
- HA12412-01, LA1245
- MSM4030RS, MSM4520
- NJM1496D, NJM4558D
- TC4011P, TC4022BP
- TC9157P, TD6301AP
- DBB10-B
- KV1226
- UB-152FF
- 05Z6.2X, 05Z6.2Y, 05Z6.2Z
- 1S158TP-3, 1S2473T77, 10E-2
- SEL2210S, SEL2410E, TLG-123A, TLS-123

— Compsit, Sub Channel & L-ch Signal Line
 - - - Sub Channel & R-ch Signal Line